FLOORING ▸ Interior

PROTECTIVE WEAR-RESISTANT FINISH
Fornace Bernasconi (also used for routine maintenance)
SATIN, gloss **DIAMANTE**, matte **WOPLUS NO-LUX** (choice of)
- For use on dry surfaces
- Spread evenly using a mop or rag
- Coverage: ~10 m2/L

LEVELLING PRIMER x1 · 2h · x1
Wax-based *Fornace Bernasconi*
- For use on dry surfaces
- Spray or brush application with uniform layers
- Coverage: ~10 m2/L

STAIN-RESISTANT COATING *Fornace Bernasconi*
- For use on dry or uniformly-damp surfaces
- Spray or brush application
- Coverage: ~8 m2/L

WATER REPELLENT ANTI-HUMIDITY ANTI-MOLD
Fornace Bernasconi Coverage: ~6 m²/L
- For use on dry or uniformly-damp surfaces
- Spray or brush application

STRONG DESCALER *Fornace Bernasconi*
Concentrated or diluted (max 1:5)
- Scrub on with an abrasive brush (NON-METALLIC)
- Rinse with water

GROUT *Ex: Cotto Color*

WATER REPELLENT ANTI-HUMIDITY ANTI-MOLD
Fornace Bernasconi Coverage: ~4 m²/L
- For use on dry or uniformly-damp surfaces
- Spray or brush application

LEVELLING MORTAR
5÷10cm, with mesh

INSTALLATION
glued or dry

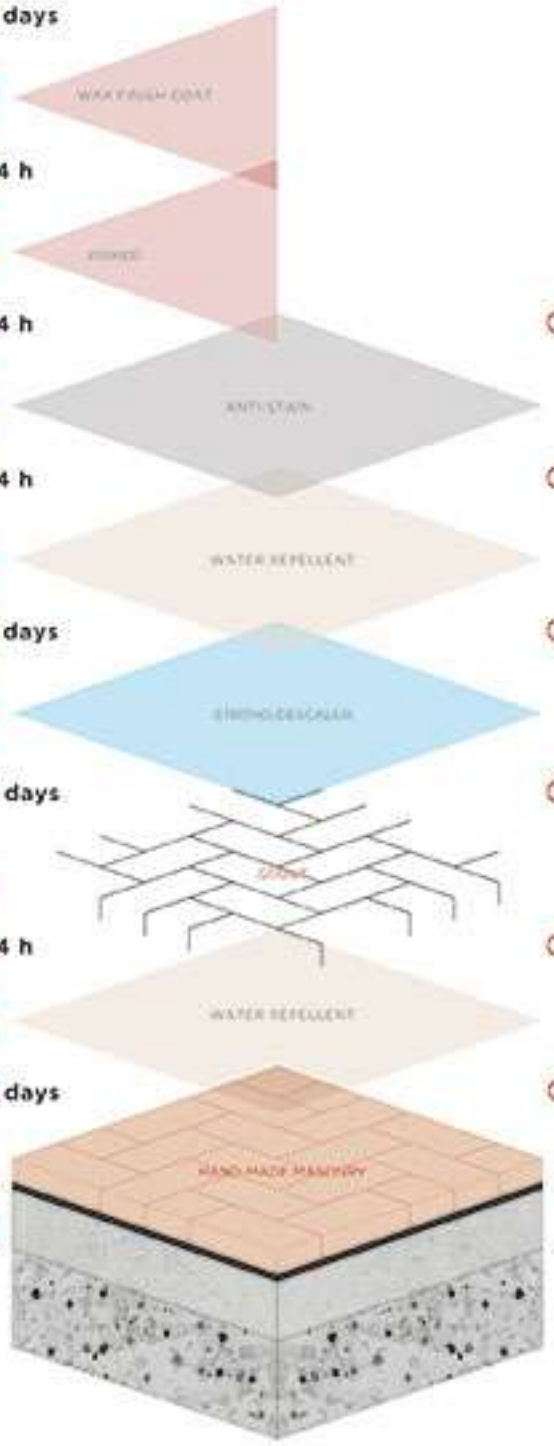

PAVEMENT ▸ Exterior

STAIN-RESISTANT COATING
Fornace Bernasconi
- For use on dry or uniformly-damp surfaces
- Spray or brush application
- Coverage: ~8 m2/L

WATER REPELLENT ANTI-HUMIDITY ANTI-MOLD
Fornace Bernasconi Coverage: ~6 m²/L
- For use on dry or uniformly-damp surfaces
- Spray or brush application

STRONG DESCALER *Fornace Bernasconi*
Concentrated or diluted (max 1:5)
- Scrub on with an abrasive brush (NON-METALLIC)
- Rinse with water

GROUT *Ex: Cotto Color*

ANTI-MOLD, ANTI-HUMIDITY WATER REPELLENT
Fornace Bernasconi Coverage: ~4 m²/L
- For use on dry or uniformly-damp surfaces
- Spray or brush application

INSTALLATION
glued or dry

LEVELLING MORTAR
5 ÷ 10 cm with mesh
Slope 1.5 ÷ 2%

(*) Wait time between each coating

NOTES

- For the best functional and aesthetic results, carefully follow the timing and quantities indicated on the product data sheet.
- All products indicated are WATER-BASED and BREATHABLE. They should be applied on dry or uniformly-damp surfaces.
- Other products can be used so long as they are breathable and non-silicone based (silicone-based treatments do not allow humidity to escape).
  Pre-grout water repellents and other treatments that are solvent-based can be used: ensure surfaces are completely dry before applying.
- Fornace Bernasconi does not assume responsibility for failure of these products if used in ways other than as indicated, if surfaces lack proper maintenace, or if 3rd-party products are used.

MATCHING GROUT

For grouting joints, Fornace Bernasconi recommends using a pre-blended cementitious mix that has a color and texture suitable for the light terracotta typical of CastelViscardo.

Alternatively, any other colored or neutral pre-mixed commercial grout can be sed so long as (in our opinion) it has a texture suitable for use with hand-made terracotta surfaces.
The **average coverage** for grouting 3-4mm wide joints between bricks 2.5cm thick is approximately **3kg per square meter**.

AVAILABLE COLORS

- **HAZELNUT** 202
- **WHITE** 001
- **ALPINE GREY** 602

SURFACE MAINTENANCE

INTERIOR

Wash with a neutral detergent **CB90** *GEAL-CHIM*

Dilute 1:10

RINSE WITH WATER

Allow to dry

CB08 PURE
or
WAX FINISH COAT
Fornace Bernasconi Dilute 1:2
SATIN, gloss DIAMANTE,
matte WOPLUS NO-LUX

EXTERIOR

STRONG DESCALER
Fornace Bernasconi
Dilute 1:10

WATER REPELLENT ANTI-HUMIDITY ANTI-MOLD
Fornace Bernasconi

STAIN-RESISTANT COATING
Fornace Bernasconi

Fornace Bernasconi

HAND-MADE TERRACOTTA FLOORING INSTALLATION AND TREATMENT

fornacebernasconi.com
info@fornacebernasconi.com

Via Vittorio Giuliani, 4 - 05014 Castel Viscardo TR
Ph. 0763.36.10.16